

000135

**SUPERMARKET REFRIGERATOR ITEM**

## Display Cooler Luxury Style



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- High-density polyurethane foam, effectively insulates external heat;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.



### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LG-620	Single Door Luxury Chiller	620*680*2120	452	320	2~8℃
LG-1260	Double Door Luxury Chiller	1260*680*2120	1008	630	2~8℃
LG-1890	Three Door Luxury Chiller	1890*680*2120	1530	1050	2~8℃
LG-2400	Four Door Luxury Chiller	2400*680*2120	2000	1260	2~8℃
LG-3000	Five Door Luxury Chiller	3000*680*2120	2520	1460	2~8℃

## Display Cooler Luxury Style



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- High-density polyurethane foam, effectively insulates external heat;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.



### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LG-600	Single Door Luxury Chiller	600*680*2120	369	320	2~8℃
LG-1100	Double Door Luxury Chiller	1100*680*2120	738	660	2~8℃
LG-1630	Three Door Luxury Chiller	1630*680*2120	1129	990	2~8℃

## Display Freezer Units On Top



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- High-density polyurethane foam, effectively insulates external heat;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.



### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LGD-660	Single door commercial display freezer	658*690*2120	444	750	-18~-22°C
LGD-1280	Double doors commercial display freezer	1280*690*2120	953	1200	-18~-22°C
LGD-1910	Three doors commercial display freezer	1910*690*2120	1450	1650	-18~-22°C

## Dazzling Black Display Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Three-color lights can be switched at will to enhance the atmosphere and style;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.

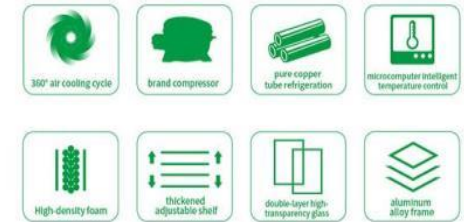

Display chiller for drinks/beer/dairy...

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Volume	Power	Temperature
LG-1100J	Double door beverage refrigerator for bar	1100*600*2050	660	470	2~8°C
LG-1630J	Three door beverage refrigerator for bar	1630*600*2050	880	740	2~8°C

## Display Freezer Units On Bottom



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- High-density polyurethane foam, effectively insulates external heat;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.

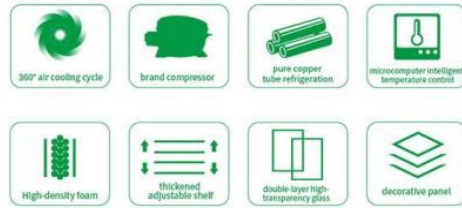

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LGD-660	Single Door Display Freezer	658*690*2120	444	750	-18~-22°C
LGD-1280	Double Door Display Freezer	1280*690*2120	953	1200	-18~-22°C
LGD-1910	Three Door Display Freezer	1910*690*2120	1450	1650	-18~-22°C

## Display Cooler Units On Bottom



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- High-density polyurethane foam, effectively insulates external heat;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.

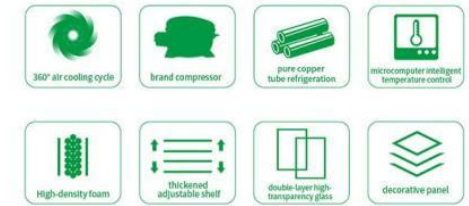

### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LG-1260XP	2 Doors Bottom Mounted <b>Cooler</b>	1260*690*2120	1008	630	2~8°C
LG-1860XP	3 Doors Bottom Mounted <b>Cooler</b>	1860*690*2120	1530	1050	2~8°C
LG-2400XP	4 Doors Bottom Mounted <b>Cooler</b>	2400*690*2120	2000	1260	2~8°C

# PROFESSIONAL BAKING EQUIPMENT MANUFACTURING





## CONTENETS

Company profile	02
1 Combined furnace	04
2 Combined furnace	06
Intelligent electric deck oven	08
Luxury Electric oven	10
Luxury gas oven	12
Split type electricoven	14
Multifunctionalcombined electricfurnaceand Proofer	16
Convection oven	18
Rotary oven	20
Dough Mixer	22
Dough sheeterand Cake Planetary Mixer	24
Pizza stove and Fronzen Dough Cabinet	26
Dough dividerand Dough moulder	28
Bakingtray series and Breadtrolley	30



## CONVECTION OVEN

1. Inside and outside of the oven all in stainless steel, strong function, small size, low energy consumption, large output
2. Automatic temperature control, double timers to control baking time and spray steam time separately
3. Adjustable duct to ensure the hot air full convection and uniformly distribution in the chamber, with lights
4. The motor can be automatically reversed on time to reach baking evenly
5. The special sealing device of furnace door ensures the uniformity of baking products.

## EUROPEAN STYLE INTELLIGENT OVEN

1. The exterior is made of all stainless steel (optional: Cool Black Wire drawing without fingerprint board)
2. The door is made of inner-open type and heat-reflecting glass.
3. U-type corrugated heating tube is used for heating.
4. Microcomputer control, accurate temperature control, with 16 kinds of baking products data storage function, with timing alarm system, lighting function, easy to understand the operation.
5. Separate control of the upper and lower fire, thick insulation, thick low plate design high temperature deformation, durable. Kill.
6. Can Be customized continuous steam injection system, imported mullite plate.
7. Auxiliary heating of thyristor Film Block. Baking Range: Moon cake, cake, bread, all kinds of pastry, Chinese dim sum, western biscuits, etc.

## RETARDER PROOFER

1. Micro-computer touch panel to control the temperature and humidity.
2. Automatic intelligent working by program, chilling or frozen-unfreeze-fermenting by itself.
3. All in stainless steel, PU insulation layers, outstanding refrigeration and fermenting system.
4. Adopt high quality blower hot air circulation design, make the temperature and humidity inside the box uniform.
5. Imported compressor, water enter automatic and water outlet device.



ction oven <+ European



Model	Heating Way	Capacity	EXT.DIM	DIM	Voltage & Power	N.W
			LXWXH(L*W*H)	(L*W*H)		
JMC-5DJ	electric	5trays	840x810x2065mm	400x600mm	220V~/4kW	75kg
Model	Heating Way	Capacity	EXT.DIM	DIM	Voltage & Power	N.W
JMC-60DCT	electric	3deck6trays	1280x1205x2065mm	400x600mm	380V/3N~/19.3kW	580kg
Model	Temperat ure	Capacity	EXT.DIM	DIM	Voltage & Power	N.W
JMC-36L2	5°C-15°C	36trays	800x1160x2065mm	400x600mm	220V~/5.5kW	250kg

# Convection oven + Luxury oven + Proofer



## CONVECTION OVEN

1. Inside and outside of the oven all in stainless steel, strong function, small size, low energy consumption, large output
2. Automatic temperature control, double liners to control baking time and spray steam time separately
3. Adjustable duct to ensure the hot air full convection and uniformly distribution in the chamber, with lights
4. The motor can be automatically reversed on time to reach baking evenly
5. The special sealing device of furnace door ensures the uniformity of baking products.

## ELECTRIC OVEN

1. Microcomputer control, accurate temperature control, 16 kinds of baking product data storage function, with timed alarm system, lighting function, simple and easy to operate.
2. Big glass door, double-layer insulation, more intuitive to check the baking products, easy to clean.
3. Use the special imported stainless steel heater, the normal life is more than a decade, the main parts imported from Germany Schneider brand.
4. Special door seals to ensure the uniformity of baked products.
5. Each deck can be separated, easy to handle, separate control of upper and lower fire, thicker insulation, thicker bottom plate design, high temperature resistance durable.
6. Can be customized continuous steam spray system and imported lava stone. (Baking range: moon cakes, cakes, bread, all kinds of crispy, Chinese dim sum, western-style biscuits, etc.)

## RETARDER PROOFER

1. Micro-computer touch panel to control the temperature and humidity.
2. Automatic intelligent working by program, chilling or frozen-unfrozen-fermenting by itself.
3. All in stainless steel PU insulation layers, outstanding refrigeration and fermenting system.
4. Adopt high quality blower hot air circulation design, make the temperature and humidity inside the box uniform.
5. Imported compressor, water enter automatic and water outlet device.

Model	Heating Way	Capacity	EXT_DIM	DIM	Voltage & Power	N.W
			(L*W*H)	(L*W*H)		
JMC-5DH	electric	5 Strays	780x1210x2065mm	400x600mm	380V/3N ~ /9kW	120kg
Model	Heating Way	Capacity	EXT_DIM	DIM	Voltage & Power	N.W
JMC-60DH	electric	3deck&6trays	1360x1290x2065mm	400x600mm	380V3N~/18kW	620kg
Model	Temperature	Capacity	EXT_DIM (L*W*H)	DIM (L*W*H)	Voltage & Power	N.W
JMC-36L2	5°C-15°C	36trays	800x1160x2065mm	400x600mm	220V ~ /5.5kW	250kg

# INTELLIGENT ELECTRIC DECK OVEN



JMG60DS

## Product introduction

1. The exterior is made of all stainless steel (optional: Cool Black Wire drawing without fingerprint board)
2. The door is made of inner-open type and heat-reflecting glass
3. U-type corrugated heating tube is used for heating.
4. Microcomputer control, accurate temperature control, with 16 kinds of baking products data storage function, with timing alarm system, lighting function, easy to understand the operation.
5. Separate control of the upper and lower fire, thick insulation, thick low plate design high temperature deformation, durable. Kill.
6. Can Be customized continuous steam injection system, imported mulite plate.
7. Auxiliary heating of thyristor FIm Block. Baking Range: Moon cake, cake, bread, all kinds of pastry, Chinese dim sum, western biscuits, etc.



Model	Heating Way	Capacity	EXT.DIM <L*W*H>	DIM <L*W*H>	Voltage & Power	N.W
JMC-60DCT	electric	3层6盘 3deck6trays	1280x1205x2065mm	400x600mm	380V/3N ~/19.3kW	470kg
JMC-60DC	electric	3层6盘 3deck 6trays	1280x1205x2065mm	400x600mm	380V/3N ~/19.3kW	420kg
JMC-60DST	electric	3层6盘 3deck 6trays	1280x1205x1910mm	400x600mm	380V/3N ~/19.3kW	470kg
JMC-60DS	electric	3层6盘 3deck 6trays	1280x1205x1780mm	400x600mm	380V/3N ~/19.3kW	420kg
JMC-80DS	electric	4层8盘 4deck Strays	1280x1205x1930mm	400x600mm	380V/3N~/25.7kW	560kg
JMC-90DS	electric	3层9盘 3deck9trays	1700x1205x1780mm	400x600mm	380V/3N~/26.5kW	540 kg

## LUXURY ELECTRIC OVEN



1. Microcomputer control, accurate temperature control, 16 kinds of baking product data storage function, with timed alarm system, lighting function, simple and easy to operate.

2. Big glass door, double-layer insulation, more intuitive to check the baking products, easy to clean.

3. Use the special imported stainless steel heater, the normal life is more than a decade, the main parts imported from Germany Schneider brand.

4. Special door seals to ensure the uniformity of baked products.

5. Each deck can be separated, easy to handle, separate control of upper and lower fire, thicker insulation, thicker bottom plate design, high temperature resistance durable.

6. Can be customized continuous steam spray system and imported lava stone.

(Baking range: moon cakes, cakes, bread, all kinds of crispy, Chinese dim sum, western-style biscuits, etc).

7. Each deck can be separated, easy to handle, separate control of upper and lower fire thicker insulation, thicker bottom plate design, high temperature resistance durable.

8. Can be customized continuous steam spray system and imported lava stone.



Model	Heating Way	Capacity	EXT.DIM (L*W*H) m	Chamber.DIM (L*W*H) mm	Voltage & Power	N.W
JMC-20DH	electric	1deck2trays	1360x1100x710	910x670x220	380V3N ~ /6kW	190kg
JMC-40DH	electric	2deck4trays	1360x1100x1510	910x670x220	380V3N ~ /12kW	450kg
JMC-60DH	electric	3deck 6trays	1360x1290x2065	910x670x220	380V3N ~ /18kW	620kg
JMC-90DH	electric	3deck 9trays	1790x1290x2065	1330x670x220	380V3N ~ /24kW	795kg
JMC-120DHT	electric	3deck 12trays	1910x1290x2065	1460x805x220	380V3N ~ /27kW	830kg
JMC-120DH	electric	3deck 12trays	2200x1290x2065	1750x670x220	380V3N ~ /27kW	850kg
JMC-40DHF	electric	2decks 4trays+8trays p rooler	1360x1290x2065	910x670x220	380V3N ~ /14.5kW	580kg

# LUXRY GAS OVEN

1. Microcomputer control, accurate temperature control, 18 kinds of baking product data storage function, with timed alarm system, lighting function, simple and easy to operate.
2. Big glass door, double-layer insulation, more intuitive to check the baking products, easy to clean.
3. Unique design of the fire tube, the combustion will be more complete and the temperature rise will be faster.
4. The chamber use advanced aluminum coated steel which unique fire regulation function to ensure that the color of the baked product is uniform.
5. Double safety gas solenoid valve, anti-leakage alarm protection high-energy pulse ignition monitoring system. Ensure the absolute safety of the product during use.
6. Special door seals to ensure the uniformity of baked products.
7. Each deck can be separated, easy to handle, separate control of upper and lower fire thicker insulation, thicker bottom plate design, high temperature resistance durable.
8. Can be customized continuous steam spray system and imported lava stone.  
(Bakin grange: moon cakes, bread, all kinds of crispy, Chinese dim sum, western-style biscuits, etc.)



Model	Heating Way	Capacity	EXT.DIM (L*W*H) m	Chamber.DIM (L*W*H) m	Voltage & Power	N.W
JMC-20RH	gas	1deck2trays	1400x1100x760m	910x670x220mm	220V~/0.1kW	210kg
JMC-40RH	gas	2deck4trays	1460x1100x1765m	910x670x220mm	220V~/0.2kW	460kg
JMC-60RH	gas	3deck 6trays	1460x1100x1845m	910x670x220mm	220V~/0.3kW	630kg
JMC-90RH	gas	3deck 9trays	1880x1100x1845m	1330x670x220mm	220V~/0.3kW	800kg
JMC-120RHT	gas	3deck 12trays	2010x1265x1845m	1460x805x220mm	220V~/0.3kW	860kg
JMC-120RH	gas	3deck 12trays	2300x1100x1845m	1750x670x220mm	220V~/0.3kW	920kg
JMC-40RHF	gas	2decks 4trays+8trays roller	1400x1100x1900m	910x670x220mm	220V~/0.27kW	600kg

## INTELLIGENT ELECTRIC OVEN

### Product introduction

1. All adopt microcomputer digital control system, the quality is stable, and the temperature is accurate and intuitive.
2. Double-layer tempered large glass door, the line of sight is better, the furnace door is resistant to high temperature sealing, and it is more energy-saving and environmentally friendly.
3. The furnace uses high-quality aluminum-plated to increase the design and make the baking more uniform.
4. Far-infrared heating tube makes baking more energy-saving and durable.
5. Each layer is designed to be fired up and down, with simple operation and timed alarm function.
6. Auxiliary heating of thyristor Film Block. Baking Range: Moon cake, cake, bread, all kinds of pastry, Chinese dim sum, western biscuits, etc.



1320mm



1780mm

Model	Heating Way	Capacity	EXT_DIM (L*W*H) mm	DIM (L*W*H) mm	Voltage & Power	N.W
JMC-40DJ	electric	2deck4trays	1320x1080x1365	400x600mm	380V/3N~/13.2kW	160kg
JMC-60DJ	electric	3deck6trays	1320x1080x1780	400x600mm	380V/3N~/19.8kW	220kg
JMC-90DJ	electric	3deck 9trays	1740x1080x1780	400x600mm	380V/3N~/24kW	300kg

1080mm

# MULTIFUNCTIONAL COMBINED ELECTRIC FURNACE



Model	Heating Way	Capacity	EXT.DIM (L*W*H)	DIM (L*W*H)	Voltage & Power	N.W
DBC-5DJ+20DH+XF	electric	商標	1360x1100x2200mm	400x600mm	380V/3N ~/15.6kW	300kg

## RETARDER PROOFER



### Product introduction

1. Micro-computer touch panel to control the temperature and humidity
2. Automatic intelligent working by program chilling or frozen-unfrozen-forming by itself
3. AU in Stainless Steel PU insulation layers: outstanding refrigeration and forming system
4. Automatic airflow circulation system make sure the uniformity of the temperature and humidity
5. Imported compressor water enter automatically and water outlet device



JMF-36L2                      JMF-36LC/JMF-36LD                      JMF-18LC/JMF-18LD

Model	Temperature	Capacity	EXT.DIM (L*W*H)	DIM (L*W*H)	Voltage & Power	N.W
JMF-18LC	-1°C-5°C	18(trays)	500x960x2150mm	400x600mm	220V~/2.85kW	190kg
JMF-32LC	-1°C-5°C	32(trays)	800x1160x1980mm	400x600mm	220V~/3.6kW	200kg
JMF-36LC	-1°C-5°C	36(trays)	800x1160x2150mm	400x600mm	220V~/3.6kW	210kg
JMF-18LD	10°C~15°C	18(trays)	500x960x2150mm	400x600mm	220V~/2.85kW	190kg
JMF-36LD	10°C~15°C	36(trays)	800x1160x2150mm	400x600mm	220V ~/3.6kW	200kg
JMF-36L2	5°C~15°C	36(trays)	800x1160x2150mm	400x600mm	220V~/5.5kW	210kg

# Convection oven

1. Inside and outside of the oven all in stainless steel, strong function, small size, low energy consumption, large output
2. Automatic temperature control, double timers to control baking time and spray steam time separately
3. Adjustable duct to ensure the hot air full convection and uniformly distribution in the chamber, with lights
4. The motor can be automatically reversed on time to reach baking evenly



780mm

1. Inside and outside of the oven all in stainless steel, strong function, small size, low energy consumption, large output
2. Automatic temperature control, double timers to control baking time and spray steam time separately
3. Adjustable duct to ensure the hot air full convection and uniformly distribution in the chamber, with lights
4. The motor can be automatically reversed on time to reach baking evenly



Model	Heating Way	Capacity
JMC-5DH	electric	5 trays

EXT.DIM (L*W*H)	DIM (L*W*H)	Voltage & Power	N.W
780x1240x740mm	400x800mm	380V-9KW	85kg

Model	Heating Way	Capacity	EXT.DIM (L*W*H)	DIM (L*W*H)	Voltage & Power	N.W
JMC-5DJ	electric	5 trays	840x810x645mm	315x435mm	220V ~ 4kW	40kg

# INTELLIGENCE ROTARY OVEN

## Product feature



1. Inside and outside of rack oven all good stainless steel.
2. Unique designed door with seal rubber on the frame, door lock and whole plate for the trolley in and out which is easy to operate, durable and good sealing.
3. Using high-density insulation cotton on one side, insulation cotton thickness more than 150mm, heat loss less.
4. Special designed duct made by thickened stainless steel double-layer no deformation in long time high temperature state and five adjustable sections to adapt different products.
5. Fireproof part made of mold casting, combustion exchange part all 304 thick stainless steel, heat exchange system using seamless stainless steel pipe welded together to increase the effective heat, save energy.
6. Transmission auxiliary components made of German ball mill made of carbon, to ensure that the high temperature state is not deformed more durable.

7. Imported Japan burner "Olympia" and Italy burner "Derrote" as your request.

8. All important spare parts are imported from Taiwan and Germany.

Two speeds of hot air circulation to achieve the baking speed and quality of the baking products. Open the door, the platform can automatically stop in right place, the automatic exhaust system to suck away the heat, The oven automatically working after closed the door. Automatically temperature controller and timer to control baking time. Failure warning and indication of heating, revolving timer power hot air speed. Steam device and trolley for tray size: 460x720mm is customized.



JMX-32C/32R

Model	Heating Way	Capacity	EXT.DIM (L*W*H)	DIM (L*W*H)	Voltage & Power	N.W
JMX-32CI	diesel	1 trolley 32trays	1810x2755x2600mm	460x720mm	380V/3N~/3.5kW	1900kg
JMX-32RI	gas	1 trolley 32trays	1810x2755x2600mm	460x720mm	380V/3N~/3.5kW	1900kg
JMX-32DI	electric	1 trolley 32trays	1660x2755x2600mm	460x720mm	380V/3N~/54kW	1900kg

Model	Heating Way	Capacity	EXT.DIM (L*W*H)	DIM(L*W*H)	Voltage & Power	N.W
JMX-16C	diesel	1 trolley, 16 trays	1440x2290x2600mm	460x720mm	380V/3N~/3.3kW	1680kg
JMX-32C	diesel	1 trolley, 32trays	1810x2755x2600mm	460x720mm	380V/3N~/3.5kW	1900kg
JMX-32R	gas	1 trolley, 32trays	1810x2755x2600mm	460x720mm	380V/3N~/3.5kW	1900kg
JMX-32D	electric	1 trolley, 32trays	1660x2755x2600mm	460x720mm	380V/3N~/54kW	1900kg
JMX-64C	diesel	2 trolley, 64trays	2340x3160x2610mm	460x720mm	380V/3N~/5kW	2850kg
JMX-64R	gas	2 trolley, 64trays	2340x3160x2610mm	460x720mm	380V/3N~/5kW	2850kg
JMX-64D	electric	2 trolley, 64trays	2340x3160x2610mm	460x720mm	380V/3N~/72kW	2850kg



## DOUBLE CYLINDER

### Product feature

1. Microcomputer controller automatic program settings easy operation visual belt tensioning system easy to remove the belt easy maintenance
2. Using the original imported accessories (the whole machine using the United States Gates and Japan Samungait) wear with overload and
3. Double motor design to achieve double-motion double-speed operation the speed is fast reversing any conversion with a touch function The hook and the bottom of the gap is only 2-3mm not stick bottom shorten the mixing time so that the dough more flexible Gluten spread



JMH-75F/100F



JMH-125F

1. Easy to operate, convenient and practical, saving manpower.
2. The product uses a jaking mechanism to damp the dough, saving time and effort.
3. In parts of the key components, with a strong power.
5. Applicable to large-scale food processing plants, professional supporting bread production line.



Model	Flour	EXT.DIM (L*W*H)	Voltage& Power	SLOW SPEED OF HOOK	FAST SPEED OF HOOK	N.W
JMH-12.5	12.5kg	550x830x1050mm	220V/380V3N ~ 2.2kW	140	280	250kg
JMH-15	15Kg	630x960x1230mm	380V3N ~ 2.4kW	145	285	297kg
JMH-25	25kg	650x960x1230mm	380V3N~4.5kW	132	268	357kg
JMH-50	50kg	720x1150x1480mm	380V3N~7kW	120	245	455kg
JMH-75	75kg	750x1400x1600mm	380V3N~10kW	118	225	548kg
JMH-100	100kg	884x1450x1530mm	380V3N ~ 12.7kW	115	230	800kg

Model	Flour	EXT.DIM (L*W*H)	Voltage& Power	SLOW SPEED OF HOOK	FAST SPEED OF HOOK	N.W
JMH-75F	375kg	1600x1550x1620mm	380V3N ~ /12kW	130	260	1322kg
JMH-100F	4100kg	1650x1600x1620mm	380V3N ~ /13kW	130	260	1530kg
JMH-125F	5125kg	1700x1650x1650mm	380V3N~15.5kW	130	260	1800kg

## CRAWLER PIZZA STOVE



### Product introduction

1. Microcomputer intelligent control when the baking temperature and chain speed are set the chain will automatically deliver food The chain drive can be operated in positive and negative way. When the product is baked, the product will be discharged automatically.
2. Use high-quality SS304 stainless steel electric heating pipe and use it for 30000 hours at ease The shell is made of stainless steel plate with sufficient thickness of 1.2mm-2.0mm The high-pressure hot air is continuously circulated and radiated to the pizza food through the up and down blast system so that the pizza can be evenly colored when it is out of the oven.
3. Quiet operation design detachable mesh chain easy to clean.

Model	Heating Way	Chain size	EXT.DIM (L*W*H)	Height(mm)	Voltage & Power	N.W
JMS-15R	gas	1170x400mm	1270x900x450mm	80mm	220V ~ /0.35kW	120kg
JMS-18R	gas	1390x530mm	1950x1015x450mm	80mm	220V ~ /0.2kW	120kg
JMS-15D	electric	1120x400mm	1230x890x450mm	80mm	220V ~ /7.5kW	110kg
JMS-18D	electric	1340x530mm	1950x1010x450mm	80mm	220V ~ /10kW	120kg

## FRONZEN DOUGH CABINET

### PAstry REFRIGERATOR

1. Producing by high-quality high-performance environmental material which stand with the high strength operation
2. Special design to ensure that the refrigerator through the entire cabinet quickly reach the required temperature
3. Internal and external all in 304 stainless steel environmentally friendly high-density foam layer
4. Automatic defrosting and draining water from the evaporator efficient exchange of copper evaporator



Model	Temperature	Voltage & Power	EXT.DIM (L*W*H)	DIM (L*W*H) N.W(KG)	
JMD-1500T	-5°C-10°C	220V~ /0.38kW	1500x800x850mm	400x600mm	65 Kg
JMD-1800T	-5°C-10°C	220V~ /0.39kW	1800x800x850mm	400x600mm	80Kg

### WATER CHILLER

#### Product introduction

1. Mixing dough with cold water can reduce the temperature of the dough to keep the best temperature. So as not to damage the dough's physical properties and chemical composition and baked out of bread clear and soft. Mixing dough with cold water can make the bread shape better. It pays out dough mixer performance to ensure the normal operation of production line.

Model	Capacity	Voltage & Power	EXT.DIM (L*W*H)	Min Temperature N.W(KG)	
JMD-95L	95L	220V~ /0.75kW	800x530x950mm	5°C	100Kg
JMD-195L	195L	220V~ /1.5kW	800x600x1380mm	5°C	200Kg



## BLAST FREEZER



#### Product introduction

1. Hard stainless steel housing and liner with automatic closing device
2. Easy to clean easy to change the spherical magnetic door seal environmentally friendly 75mm zero ODP foam cold insulation layer
3. Advanced refrigeration systems high energy efficiency of imported compressors greatly improving work efficiency

Model	Working Temperature	DWG Capacity	EXT.DIM (L*W*H)	DIM (L*W*H)	Voltage & Power	DWG N.W
JMD-24L4	-25°C-18°C	24@trays(4L)	1230x800x1953mm	400x600mm	220V-7.5kW	190kg
JMD-24L2	-25°C-18°C	24@trays(2L)	1230x800x1953mm	400x600mm	220V-7.5kW	190kg
JMD-12L2	-25°C-18°C	24@trays(2L)	610x800x1953mm	400x600mm	220V-7.0kW	150kg



**DOUGH SHEETER**



JMQ-520



JMQ-520E/630E



款式JMQ-520S

**Product feature**

1. Suitable for pastry crisp cake Melakaua crisp etc can also be used for rolling dough
2. Special materials and manufacturing process low noise easy to wear durable
3. Using imported components the best steel the pressing roller through a special treatment not sticking to dough and not easy be scratched
4. Pressure roller and scraper with a professional design uniform thickness so that the thickness of dough to the best results
5. Folding structure save space easy handling

Model	Conveyor belt width	EXT_DIM (L*W*H)	Voltage & Power	N.W
JMQ-520	520mm	2740x870x1050mm	220V/380V3N ~0.55kW	190kg
JMQ-650	650mm	2815x1100x1065mm	220V/380V3N ~0.75kW	230kg
JMQ-520S	520mm	1800x810x585mm	220V/380V3N~0.75kW	140kg
JMQ-520E	520mm	2520x955x1285mm	220V/380V3N~0.75kW	220kg
JMQ-630E	630mm	3530x1040x1285mm	220V/380V3N ~0.75kW	260kg

**EGG BEATER&CAKE PLANETARY MIXER**

**Product feature**

1. Suitable for playing cake cream fillings little dough etc also can mix dough three-speed the speed is fast the amount of bubbles into multiple uniformity the cake has a high swell rate on baking using a star gear belt driving lower noise and strong rotating force Taiwan imported motor reliable and durable full of power



Model	Flour	EXT_DIM (L*W*H)	Voltage & Power	SLOW SPEED OF HOOK	FAST SPEED OF HOOK	N.W
JMH-12.5	12.5kg	550x830x1050mm	220V/380V 3N~0.2kW	140	280	250kg
JMH-15	15kg	630x960x1230mm	380V 3N~0.24kW	145	285	297kg



JMB-10L/20L

JMB-30L/40L

JMB-50L

JMB-60L

JMB-80L

Model	Bowl Capacity(l)	EXT_DIM (L*W*H)	Voltage & Power	Mixing speed (r/min)	Mixing speed (r/min)	N.W
JMB-10L	10	480x460x680 mm	220V ~0.19kW	165/350/750	50/90/180	20kg
JMB-20L	20	560x560x830 mm	220V/380V3N ~0.5kW	150/305/600	40/80/163	83kg
JMB-30L	30	640x700x1090 mm	380V3N~1kW	134/268/518	44/88/170	150kg
JMB-40L	40	640x700x1090 mm	380V3N~1.05kW	134/268/518	44/88/170	162kg
JMB-50L	50	660x730x1180 mm	380V3N ~1.20kW	134/268/518	44/88/170	217kg
JMB-60L	60	700x850x1340 mm	380V3N ~1.30kW	135/225/375	45/75/125	334kg
JMB-80L	80	750x900x1410 mm	380V3N ~1.40kW	135/225/375	45/75/125	364kg

## DOUGH DIVIDER —

### DIVIDER AND ROUNDER

#### Product introduction

1. It brings in Taiwan advanced technology extended service life
2. Dividing into round pieces in one time Simply operation

Model	dough weight	EXT.DIM (L*W*H)	Voltage & Power	N.W
JMK-30	30-100g	640X540X2100mm	380V/3N/0.75kW	360kg

### HYDRAULIC DIVIDER

#### Product introduction

1. The automatic hydraulic divider comes with high quality spare parts and a unique framework design to make working operations solid and stable
2. The divider divides the dough using an automatic hydraulic system
3. Flattens the dough gradually to prevent destroying the dough structure
4. The divider can divide the dough into 100-600g each piece which fits a variety of customer needs. The dough divider is easy to operate clean and maintain

Model	Dough range	Power	EXT.DIM (L*W*H)	N.W(KG)
JMK-20H	135-600g (20pcs/1mm)	380V/1.5kW	64x660x960mm	400Kg

### AUTOMATIC/MANUAL DOUGH DIVIDER

#### Product introduction

1. Specially designed to divide dough or stuffing into 36 equal pieces precisely
2. Automatic dividing better efficiency
3. It is equipped with quality electric motor and components to improve the life machine

Model	Dough weight range	Voltage & Power	EXT.DIM (L*W*H)	Net weight (KG)	型号 Model	Dough weight range	EXT.DIM (L*W*H)	Net weight (KG)
JMK-36	30-180g	220V/0.38kW	520x400x1040mm	150Kg	JMK-36	30-140g/pcs	520x460x1620mm	70Kg



### BREAD TOAST SLICER

#### Product introduction

1. Using Japan imported blades non-stick after cut the products surface is smooth and equal
2. Can cut bread toast steamed bun and many other kinds of products into pieces
3. Small size high efficiency easy to move and save space
4. Important components are made of stainless steel and accord with food hygiene standard

### Dough moulder & Bread slicer



MODEL	Blade distance	Blades quantity	EXT.DIM (L*W*H)	Voltage & Power	N.W
JMP-31	12mm	31 blades	680x780x780mm	220V/380V/3N/0.25kW	75kg
JMP-39	9.5mm	39 blades	680x780x780mm	220V/380V/3N/0.5kW	80kg



### TOAST MOULDER

#### Product introduction

1. Unique crinoid design low noise not easy to wear and tear
2. The roller with hard chrome plating non-stick and not easy to scratch
3. Full exhaust the maximum stretch dough finished goods is excellent
4. About 3000pcs dough per hour production speed greatly improve the efficiency of production
5. Multi-volume 1.5 turns compare with the ordinary machine



Model	Belt width	dough weight	EXT.DIM (L*W*H)	Voltage & Power	N.W
JMZ-360	380mm	50-600g/pcs	1350x650x1160mm	220V/380V/3N/0.75kW	198kg

### FRENCH BAGUETTE MOULDER

#### Product introduction

1. Baguette Moulder is the special design for making French bread which can roll press roll and can shape dough into sticks. It is also can be applied to shape toast and other loaf bread etc.
2. France imported schneider appliance long service life quality assurance. Machine equip with the inlet protection device safe and reliable. 100% original franco-made conveyor belt with high quality and longer service life dust free never deplate. Accord with international food hygiene standard.




Model	Belt width	dough weight	EXT.DIM (L*W*H)	Voltage & Power	N.W
JMZ-750	730mm	50-1200g/pcs	1000x970x1580mm	220V/380V/3N/1kW	302kg



Cup Tray



French Baguettes Tray

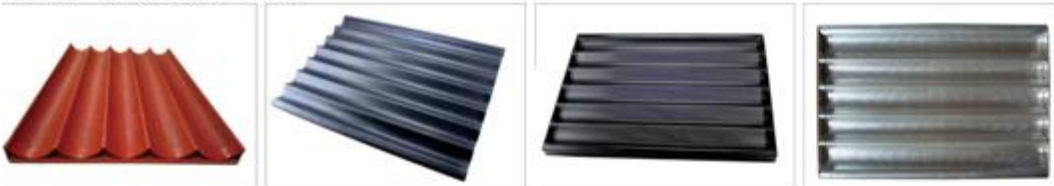

Aluminum (Teflon) Flat Tray/Pan



Past Box



JMT-15T

JMT-18T

JMT-32X

High Temperature Resistant Wheels different levels and tray size can be customized

Model	Name	EXT. DIM (L*W*H)
JMT-15T	15	460x670x1680mm
JMT-18T	18	470x600x1690mm
JMT-32X	32	680x830x1760mm

Baking tray size

600x400x25mm

660x460x25mm

720x460x25mm

800x800x25mm

460x630x25mm

400x600x50mm



Enjoy  
The joy of baking

The joy of baking

# BAKING EQUIPMENT

A large stainless steel commercial oven with multiple tiers, set against a red background. The oven has a control panel on the right side with several buttons and a digital display. To the right of the oven is a collage of various baked goods, including croissants, breads, and pastries.

www.thermador.com

Four small icons representing different types of baked goods: a round loaf, a croissant, a slice of pie, and a bowl of bread.

# EXPLORE

## BAKING PATH

i company has been working with various chefs  
In order to present a better product effect  
Listen patiently to their opinions and Suggestions  
Constantly upgrade the process, make let chef  
A handy oven for baking  
Quality is our consistent goal  
Just to help the chef keep breaking himself  
Let diners linger

## ONE TRAYS ELECTRIC OVEN SERIES



## ELECTRIC OVEN



101

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking



101Y

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking



101T

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking



101P

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking

oven

can make better food.

croissants are bread that look like croissants.  
croissants need flour: 300G, yeast:  
1g, sugar: 15G, salt: 6G, milk: 180ML, butter:  
15G (for pasta) , butter: 150G



Full Window baking: Watch the baking in real time



Precise temperature control knob: the temperature control number can reach ten digits.

PRODUCT MODEL	PRODUCT SIZE	POWER	VOLTAGE	NET WEIGHT	NUMBER OF HEATING TUBES
YME-101	88*57*40	3.2KW	220V	35KG	8
YME-101T	88*57*40	3.2KW	220V	35KG	8

PRODUCT MODEL	PRODUCT SIZE	POWER	VOLTAGE	NET WEIGHT	NUMBER OF HEATING TUBES
YME-101Y	88*57*40	3.2KW	220V	35KG	8
YME-101P	88*57*40	3.2KW	220V	35KG	8



**Better oven  
Better bread**  
Precise temperature control more  
perfect baking

## TWO TRAYS ELECTRIC OVEN SERIES





### 202

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking



### 202T

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking

### ELECTRIC OVEN



### 202Y

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking



### 202P

gg Large capacity, 300°C extensive temperature control, computer intelligent temperature control, 99 minutes timing, four heating modes thickened stainless steel, full window baking

oven

Can make better food.

Whole wheat bread refers to bread made with whole wheat flour without the outer bran and germ, as opposed to plain bread made with white flour.



High temperature explosion-proof lamp: baking process at a glance



15cm thick insulation layer: Wrap the oven to ensure heat insulation

PRODUCT MODEL	PRODUCT SIZE	POWER	VOLTAGE	NET WEIGHT	NUMBER OF HEATING TUBES
YME-202	88*57*76	6.4KW	220V	70KG	8
YME-202T	88*57*76	6.4KW	220V	70KG	8

PRODUCT MODEL	PRODUCT SIZE	POWER	VOLTAGE	NET WEIGHT	NUMBER OF HEATING TUBES
YME-202Y	88*57*76	6.4KW	220V	70KG	8
YME-202P	88*57*76	6.4KW	220V	70KG	8

## INSTRUMENT OVEN SERIES



102

gg Large capacity, 400°C wide temperature control computer intelligent temperature control 99 minutes timing four heating modes thickened stainless steel Easy for baking



204

gg Large capacity, 400°C wide temperature control computer intelligent temperature control 99 minutes timing four heating modes thickened stainless steel Easy for baking



306

gg Large capacity, 400°C wide temperature control computer intelligent temperature control 99 minutes timing four heating modes thickened stainless steel Easy for baking

PRODUCT MODEL	PRODUCT SIZE	POWER	VOLTAGE	NETWEIGH T	NUMBER OF HEATING TUBES
YME-102	122*82*55	6.96KW	220/380V	72KG	12
YME-204	122*82*124	13.92KW	220/380V	145KG	12
YME-306	122*82*148	20.88KW	380V	210KG	12



**101P USINGGAS**

gg Commercial gas oven, open flame heating, computer intelligent temperature control The four heating modes of the thickened stainless steel plate are easy to handle baking



**102P USINGGAS**

gg Commercial gas oven, open flame heating, computer intelligent temperature control The four heating modes of the thickened stainless steel plate are easy to handle baking



**204P USINGGAS**

gg Commercial gas oven, open flame heating, computer intelligent temperature control The four heating modes of the thickened stainless steel plate are easy to handle baking



**306P USINGGAS**

gg Commercial gas oven, open flame heating, computer intelligent temperature control The four heating modes of the thickened stainless steel plate are easy to handle baking

oven

Can make be *er food.*

Baguette is one of the most traditional French bread, rich in nutrients. The French icon is the baguette, which is a long, precious stone.



Computer temperature control: digital display touch control



Exhaust adjustment rod: easy smoke extraction

PRODUCT MODEL	PRODUCT SIZE	POWER	VOLTA GE	NET WEIGHT	GAS CONSUMPTION
YMG-101P	100*68*58	0.06KW	220V	72 KG	0.15KG/H
YMG-102P	134*90*68	0.1KW	220V	115 KG	0.3KG/H

PRODUCT MODEL	PRODUCT SIZE	POWER	VOLTA GE	NET WEIGHT	GAS CONSUMPTION
YMG-204P	134*90*148	0.2KW	220V	225KG	0.6KG/H
YMG-306P	134*90*178	0.3KW	220V	325KG	0.9KG/H

### Meat Grinder

#### Deck Type Stainless Steel Meat Grinder

Model	FW1	FW2
Capacity	1.1	1.1
Motor/Ph	30/5	30/5
Motor/Min/Ph	30	30
Height	8	8
Dimensions	33x41	43x41



#### Deck Type Stainless Steel Meat Grinder Universal Model

Model	FW1A	FW2A
Capacity	1.1	1.1
Motor/Ph	30/5	30/5
Motor/Min/Ph	30	30
Height	8	8
Dimensions	33x41	43x41



#### Luxury Stainless Steel Meat Grinder

Model	FW1L	FW2L
Capacity	1.1	1
Motor/Ph	30/5	30/5
Motor/Min/Ph	30	30
Height	8	10
Dimensions	34x41	42x41



#### Vertical Luxury/Slurry Meat Grinder

Model	Luxury Meat Grinder	Slurry Meat Grinder
Capacity	1.1	1.1
Motor/Ph	30/5	30/5
Motor/Min/Ph	30	30
Height	8	8
Dimensions	34x41	34x41



### Meat Mincer & Slicer

#### Compact Commercial Minced Mixer

Model	MM1
Capacity	1.1
Motor/Ph	30/5
Motor/Min/Ph	30
Height	8
Dimensions	43x50



#### Cryogenic Gas Meat Mincer & Slicer

Model	MM1A
Capacity	1.1
Motor/Ph	30/5
Motor/Min/Ph	30
Height	8
Dimensions	43x50



#### Meat Cull Machine

Model	MC1	MC2	MC3	MC4
Capacity	1.1	1	1	1
Motor/Ph	30/5	30/5	30/5	30/5
Motor/Min/Ph	2	1	1	1
Height	8	8	7	7
Dimensions	33x41	33x41	33x41	33x41



#### Vertical Meat Slicer

Model	MS1
Capacity	1.1
Motor/Ph	30/5
Motor/Min/Ph	30
Height	8
Dimensions	44x51



### Meat Slicer

#### Commercial

Model	MS1	MS2	MS3	MS4
Capacity	1	1	1	1
Motor/Ph	1	1	1	1
Dimensions	44x50	44x50	44x50	44x50



#### Vertical

Model	MS1A	MS2A	MS3A	MS4A
Capacity	1.1	1.1	1.1	1.1
Motor/Ph	30/5	30/5	30/5	30/5
Motor/Min/Ph	30	30	30	30
Height	11	11	11	11
Dimensions	44x54	44x54	44x54	44x54



#### Deck Type Meat Slicer With 16-chains Model

Model	MS1D	MS2D
Capacity	0.8	1.1
Motor/Ph	30/5	30/5
Motor/Min/Ph	40	40
Motor/Min/Ph	1.5	1.5
Height	8	8
Dimensions	43x40	42x40



#### Luxury Meat Slicer with 16-chains Model

Model	MS1L
Capacity	0.5
Motor/Ph	30/5
Motor/Min/Ph	0
Motor/Min/Ph	1.5
Height	8
Dimensions	44x51



#### Luxury Shredded Meat Slicer With 16-chains Model

Model	MS1S
Capacity	1.50
Motor/Ph	30/5
Motor/Min/Ph	30
Motor/Min/Ph	1.5
Height	10
Dimensions	44x51



#### Vertical Shredded Meat Slicer

Model	MS1S	MS2S
Capacity	1.1	1.1
Motor/Ph	30/5	30/5
Motor/Min/Ph	30	40
Motor/Min/Ph	30	40
Height	11	11
Dimensions	44x54	44x54



#### Cryoban Mix Machine

Model	MS1C	MS2C
Capacity	1.1	1.1
Motor/Ph	30/5	30/5
Motor/Min/Ph	40	40
Height	11	11
Dimensions	44x54	44x54



#### Deck

Model	MS1D	MS2D	MS3D
Capacity	1.1	1.5	1.1
Motor/Ph	30/5	30/5	30/5
Motor/Min/Ph	30	30	30
Motor/Min/Ph	1	1	1
Height	11	11	11
Dimensions	44x54	44x54	44x54



#### Deck Shredded Meat Slicer

Model	MS1S	MS2S
Capacity	1.5	1.5
Motor/Ph	30/5	30/5
Motor/Min/Ph	30	30
Motor/Min/Ph	2.0	2.0
Height	10	10
Dimensions	44x51	44x51



#### Vertical Cutter Machine

Model	MS1C	MS2C
Capacity	1.5	1.5
Motor/Ph	30/5	30/5
Motor/Min/Ph	30-50	30-40
Motor/Min/Ph	30-40	30-40
Height	10	10
Dimensions	44x51	44x51



#### Deck Cutter

Model	MS1C
Capacity	1.1
Motor/Ph	30/5
Motor/Min/Ph	40
Height	8
Dimensions	44x54



#### Deck Cutter

Model	MS1C
Capacity	1.1
Motor/Ph	30/5
Motor/Min/Ph	30
Height	8
Dimensions	44x54

#### MS120 Series Noodle Cutter

Model	MS120	MS120L
Capacity	1.2	1.2
Motor/Ph	30/5	30/5
Motor/Min/Ph	30	30
Motor/Min/Ph	2.0	2.0
Height	11	11
Dimensions	130	130
Dimensions	500x111	500x111



#### Commercial Turbine Horizontal Dough Mixer

Model	DM1	DM2	DM3
Capacity	1.1	1	1
Motor/Ph	30/5	30/5	30/5
Motor/Min/Ph	0	0	0
Motor/Min/Ph	0	0	0
Height	8	8	8
Dimensions	34x40	34x40	34x40



#### Commercial Turbine Horizontal Dough Mixer

Model	DM1	DM2	DM3
Capacity	1.1	1	1
Motor/Ph	30/5	30/5	30/5
Motor/Min/Ph	0	0	0
Motor/Min/Ph	0	0	0
Height	8	8	8
Dimensions	34x40	34x40	34x40



#### Simply Horizontal Dough Mixer

Model	DM1S	DM2S	DM3S
Capacity	1	1	1
Motor/Ph	30/5	30/5	30/5
Motor/Min/Ph	0	0	0
Motor/Min/Ph	0	0	0
Height	8	8	8
Dimensions	34x40	34x40	34x40



#### Food Mixer

Model	DM1S
Capacity	0.8
Motor/Ph	30/5
Motor/Min/Ph	0
Dimensions	34x40





SSD Series Spiral Dough Mixer			
Model	SSD20A	SSD30A	SSD40A
Power(kw)	1.1	1.5	1.5
Voltage(v/Hz)	220/50	220/50	380/50
Bowl Volume(L)	20	30	40
Capacity(KG)	8	12	18
Mixer Speed(r/min)	220/120	220/120	220/120
Bowl Speed(r/min)	22/12	22/12	22/12
Weight(KG)	90	98	110
Dimension(cm)	40x73x90	45x80x100	47x85x110

SSD Series Spiral Mixer			
Model	SSD20B	SSD30B	SSD40B
Power(kw)	1.1	1.5	2.2
Voltage(v/Hz)	220/50	220/50	220&380/50
Bowl Volume(L)	20	30	40
Capacity(KG)	8	12	18
Mixer Speed(r/min)	220/120	220/120	220/120
Bowl Speed(r/min)	22/12	22/12	22/12
Weight(KG)	95	103	115
Dimension(cm)	40x73x90	45x80x100	47x85x110

TBL Series Mixer		
Model	TB5L	TB7L
Power(kw)	0.3	0.35
Voltage(v/Hz)	220/50	220/50
Bowl Volume(L)	5	7
Capacity(KG)	0.5	0.5
Mixer Speed(r/min)	131-852	131-852
Weight(KG)	25	30
Dimension(cm)	37x23x41	48x30x50



B20 Mixer	
Model	B20
Power(kw)	0.8
Voltage(v/Hz)	220/50
Bowl Volume(L)	20
Capacity(KG)	6
Mixer Speed(r/min)	113/168/400
Weight(KG)	98
Dimension(cm)	53x42x78



**AG Series Noodle Presser**

Model	AG100	AG150
Power (kw)	0.8	0.8
Output (kg/h)	3000	3000
Roll Speed (rpm)	80	80
Roll Length (mm)	140	150
Roll Diameter (mm)	87	87
Weight (kg)	80	80
Dimensions (mm)	440x300	440x300



**AG105 Series Noodle Cutter**

Model	AG105-01	AG105-02
Power (kw)	1.5	2.2
Output (kg/h)	1000	2000
Roll Speed (rpm)	80	80
Roll Length (mm)	180	180
Roll Diameter (mm)	120	120
Weight (kg)	130	140
Dimensions (mm)	504x300	504x300



3

**Vertical Dough Sheeter**

Model	AG2000	AG2000B
Power (kw)	2.2	2.2
Output (kg/h)	3000	3000
Roll Speed (rpm)	80	80
Roll Length (mm)	200	240
Roll Diameter (mm)	87	87
Weight (kg)	80	80
Dimensions (mm)	450x300	550x300



**AG Series Noodle Presser**

Model	AG100	AG150	AG150B
Power (kw)	0.8	0.8	1.2
Output (kg/h)	3000	3000	3000
Roll Speed (rpm)	80	80	80
Roll Length (mm)	80	90	100
Roll Diameter (mm)	87	87	87
Weight (kg)	80	80	80
Dimensions (mm)	400x300	440x300	440x300



**AGD Series Noodle Presser**

Model	AGD100	AGD150	AGD150B
Power (kw)	1	1	1.2
Output (kg/h)	3000	3000	3000
Roll Speed (rpm)	80	80	80
Roll Length (mm)	80	90	100
Roll Diameter (mm)	87	87	87
Weight (kg)	80	80	80
Dimensions (mm)	400x300	440x300	440x300



**SSD Series Spiral Dough Mixer**

Model	SSD100	SSD150	SSD200
Power (kw)	1.1	1.8	2.4
Capacity (kg)	2000	3000	4000
Roll Volume (L)	20	30	40
Capacity (kg)	8	12	16
Roll Speed (rpm)	200/100	200/100	200/100
Roll Speed (rpm)	20/10	20/10	20/10
Weight (kg)	11	18	24
Dimensions (mm)	300x300	360x300	420x300

**SSD Series Spiral Mixer**

Model	SSD100	SSD150	SSD200
Power (kw)	1.1	1.8	2.4
Capacity (kg)	2000	3000	4000
Roll Volume (L)	20	30	40
Capacity (kg)	8	12	16
Roll Speed (rpm)	200/100	200/100	200/100
Roll Speed (rpm)	20/10	20/10	20/10
Weight (kg)	11	18	24
Dimensions (mm)	300x300	360x300	420x300

**SSD-D Series Spiral Mixer**

Model	SSD100	SSD150	SSD200
Power (kw)	1.1	1.8	2.4
Capacity (kg)	2000	3000	4000
Roll Volume (L)	20	30	40
Capacity (kg)	8	12	16
Roll Speed (rpm)	200/100	200/100	200/100
Roll Speed (rpm)	20/10	20/10	20/10
Weight (kg)	11	18	24
Dimensions (mm)	300x300	360x300	420x300

**SSD Series Spiral Mixer**

Model	SSD100	SSD150	SSD200
Power (kw)	1.5/1.8	2.4	3.0
Capacity (kg)	3000	4000	5000
Roll Volume (L)	30	40	50
Capacity (kg)	10	15	20
Roll Speed (rpm)	200/100	200/100	200/100
Roll Speed (rpm)	20/10	20/10	20/10
Weight (kg)	15	20	25
Dimensions (mm)	360x300	420x300	480x300

**PLANETARY MIXER**

**TOL Series Mixer**

Model	TOL	TOL
Power (kw)	0.7	1.0
Capacity (kg)	2000	3000
Roll Volume (L)	8	12
Capacity (kg)	3.5	5
Roll Speed (rpm)	200/100	200/100
Weight (kg)	28	35
Dimensions (mm)	300x300	360x300



**DM Mixer**

Model	DM
Power (kw)	0.8
Capacity (kg)	2000
Roll Volume (L)	20
Capacity (kg)	8
Roll Speed (rpm)	110/200/400
Weight (kg)	40
Dimensions (mm)	300x300



**DCM Mixer**

Model	DCM
Power (kw)	0.75
Capacity (kg)	2000
Roll Volume (L)	20
Capacity (kg)	8
Roll Speed (rpm)	110/200/400
Weight (kg)	40
Dimensions (mm)	300x300



**Vertical Dough Sheeter**

Model	VS10	VS15	VS20	VS30
Power (kw)	0.8	1.1	1.5	2.2
Capacity (kg)	2000	3000	4000	5000
Roll Volume (L)	10	15	20	30
Capacity (kg)	3	5	7	10
Roll Speed (rpm)	110/200/400	110/200/400	110/200/400	110/200/400
Weight (kg)	28	35	45	55
Dimensions (mm)	300x300	360x300	420x300	480x300



# Stainless steel work table

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm

Backsplash:Optional (100/150mm)

Undershelf: 2/3 Hat channels for bracing

Legs and sockets:Stainless steel or galvanized

Adjustable Bullet Feet:stainless steel or plastics,40mm  
adjustable

Table shelf:Optional,width 300mm,height600mm

Wheels:Optional,Dia 100mm,4 Swivel wheels,2 with brakes

**ALL CUSTOMIZED IS AVAILABLE**

## Work table with backsplash



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1000*600*850+100	1030*630*200	50
1200*600*850+100	1230*630*200	50
1500*600*850+100	1530*630*200	50

## Work table without backsplash



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1000*600*850	1030*630*170	50
1200*600*850	1230*630*170	50
1500*600*850	1530*630*170	50

## American type work table



Dimension (mm)	Package size (mm)	MOQ (Pcs)
610*610*850	640*640*170	50
762*762*850	792*792*170	50

## Work table with wheel:



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1200*600*850	1230*630*200	50
1500*600*850	1530*630*200	50
1800*600*850	1830*630*200	50

# Stainless Steel Sliding Door Work Table

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm

Backsplash:Optional (100/150mm)

Adjustable Bullet Feet:stainless steel, 40mm  
adjustable

Drawers:Optional

Door:Sliding door, thickness is 14mm, filled with foaming agent to avoid  
the

deformation in case of collision. Quiet and very easy to push

[ALL CUSTOMIZED IS AVAILABLE](#)

Work table without backsplash without drawers



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1500*600*850	1530*630*170	50
1800*600*850	1830*630*170	50
2000*600*850	2030*630*170	50

Work table with backsplash



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1500*600*850+100	1530*630*200	50
1800*600*850+100	1830*630*200	50
2000*600*850+100	2030*630*200	50

Work table with drawers (Backsplash optional)



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1800*600*850	1830*630*200	50
2000*600*850	2030*630*200	50

Work table with overhead drawers



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1500*600*850	1530*630*200	50
1800*600*850	1830*630*200	50
2000*600*850	2030*630*200	50

## Warm keeping work table



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1500*600*850	1530*630*200	50
1800*600*850	1830*630*200	50
2000*600*850	2030*630*200	50

## Fresh-keeping work table



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1500*600*850	1530*630*200	50
1800*600*850	1830*630*200	50
2000*600*850	2030*630*200	50

## Warmer Display Counter



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1100*650*800	1120*670*250	50
1500*650*800	1520*670*250	50
1800*650*800	1820*670*250	50



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1500*650*800	1520*670*650	50
1800*650*800	1820*670*650	50



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1500*650*1290	1520*670*820	50
1800*650*1290	1820*670*820	50



Dimension (mm)	Package size (mm)	MOQ (Pcs)
920*355*420	940*420*230	50
1185*355*420	1200*420*230	50
1450*355*420	1500*420*230	50
705*570*300	720*600*270	50
1050*570*300	1070*600*270	50
1395*570*300	1410*600*270	50



# Stainless Steel Wall Cupboard

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm

Door:Sliding, Pull-push door or no  
door

Door:Sliding door, thickness is 14mm, filled with foaming agent to avoid  
the

deformation in case of collision. Quiet and very easy to push

[ALL CUSTOMIZED IS AVAILABLE](#)

## Stainless Steel Wall Cupboard



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1000*450*600	1030*480*200	50
1000*550*600	1030*580*200	50
1200*450*600	1230*480*200	50
1200*550*600	1230*580*200	50
1400*450*600	1430*480*200	50
1400*550*600	1430*580*200	50

# Stainless steel sink

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm  
Backsplash:Optional (100/150mm)

Drainboard:Optional, Left, right or  
both, customized

Legs:38mm Stainless steel pipe  
Adjustable Bullet Feet:stainless steel, 40mm  
adjustable

Sink bowl height:250mm  
Undershelf:Flat plate, Punched hole

[ALL CUSTOMIZED IS AVAILABLE](#)

### European style single sink



Dimension (mm)	Package size (mm)	MOQ (Pcs)
600*600*850+100	630*630*430	50
700*700*850+100	730*730*430	50

### European style Double sink



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1200*600*850+100	1230*630*430	50
1400*700*850+100	1430*730*430	50

European style Triple sink



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1800*600*850+100	1230*630*430	50
1800*700*850+100	1430*730*430	50

European style Double sink with left/right drainboard



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1800*600*850+100	1230*630*430	50
1800*700*850+100	1430*730*430	50

Single sink with single drainboard



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1200*600*850+100	1230*630*430	50
1400*700*850+100	1430*730*430	50

Stainless steel sink with cabinet



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1200*600*850+100	1230*630*980	20
1400*700*850+100	1430*730*980	20

### American style sink with backsplash and drainboard



Dimension (mm)	Package size (mm)	MOQ (Pcs)
1800*600*800	1830*630*750	50
Side:22 gauge stainless steel Drainboard:400*600mm Bowl:450*450mm Backsplash:200mm		

### Knee Operated wall mount hand wash sink



Dimension (mm)	Package size (mm)	MOQ (Pcs)
455*455*300	485*485*330	50
455*470*300	455*500*300	50
Bowl size:Square, 380*330*220mm Soap dispenser:Available Auto close after 17s		

# Stainless steel wall shelves

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm

Structure:Knock-down type and wall mounted

[ALL CUSTOMIZED IS AVAILABLE](#)

## Single and Double layer



Dimension (mm)	Package size (5pcs/carton mm)	MOQ (Pcs)
600*300*600	615*315*235	100
800*300*600	815*315*235	100
1000*300*600	1015*315*235	100
1200*300*600	1215*315*235	100
1400*300*600	1415*315*235	100
1500*300*600	1515*315*235	100
1800*300*600	1815*315*235	100
2000*300*600	2015*315*235	100

## Three Layer



Dimension (mm)	Package size (5pcs/carton mm)	MOQ (Pcs)
600*300*900	615*315*235	100
800*300*900	815*315*235	100
1000*300*900	1015*315*235	100
1200*300*900	1215*315*235	100
1400*300*900	1415*315*235	100
1500*300*900	1515*315*235	100
1800*300*900	1815*315*235	100
2000*300*900	2015*315*235	100



Dimension (mm)	Package size (5pcs/carton mm)	MOQ (Pcs)
1200*300*300	615*315*235	100
1500*300*300	1515*315*235	100
1800*300*300	1815*315*235	100
2000*300*300	2015*315*235	100



# Stainless steel trolley

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm

Structure:Welding or Knock-down type

Wheels:Dia 100mm, 4 Swivel wheels, 2 with brakes

[ALL CUSTOMIZED IS AVAILABLE](#)

Double and Triple tiers  
Trolley



Dimension (mm)	Package size (mm)	MOQ (Pcs)
800*400*900	830*430*165	100
850*450*900	880*480*165	100
900*500*900	930*530*165	100



Dimension (mm)	Package size (mm)	MOQ (Pcs)
900*550*900	930*580*165	100

Stainless steel flat car



Dimension (mm)	Package size (mm)	MOQ (Pcs)
800*500*920	930*580*165	100
900*550*920	930*580*165	100
1000*600*920	800*500*920	100

Stainless steel flour trolley



Dimension (mm)	Package size (mm)	MOQ (Pcs)
500*500*600		100
600*600*600		100

# Stainless steel bakery trolley



CUSTOMIZED AVAILABLE

## STANDARD FEATURES

Materials: 201/430/304 stainless steel

Thickness: 0.6-1.5mm

Structure: Welding or Knock-down type

Wheels: Dia 100mm, 4 Swivel wheels,  
2 with brakes

Dimension (mm)	Package size (mm)	MOQ (Pcs)
510*660*1800	1700*680*110	
910*660*1800	1700*680*140	

# Stainless steel shelves

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm

Structure:Welding or Knock-down type

Furnace:Flat board, Punched  
hole, Slatted

[ALL CUSTOMIZED IS AVAILABLE](#)



Dimension (mm)	Package size Board (mm)	Package size Legs (mm)	MOQ (Pcs)
1000*400*1500	1030*430*200	1500*100*100	50
1000*500*1500	1030*530*200	1500*100*100	50
1200*400*1500	1230*430*200	1500*100*100	50
1200*500*1500	1230*530*200	1500*100*100	50
1200*500*1800	1230*530*200	1800*100*100	50
1500*500*1500	1530*530*200	1500*100*100	50
1500*500*1800	1530*530*200	1800*100*100	50
1800*500*1500	1830*530*200	1500*100*100	50
1800*500*1800	1830*530*200	1800*100*100	50

# Stainless steel cooker hood

## STANDARD FEATURES

Materials:201/430/304stainless  
steel

Thickness:0.6-1.5mm  
Structure:Welding or Knock-down type

Size:Any dimension available

[ALL CUSTOMIZED IS AVAILABLE](#)



Dimension (mm)	Package size (mm)	MOQ (Pcs)
800*700*350	830*730*220	50
1000*700*350	1030*730*220	50
800*700*450	830*730*220	50
1000*700*450	1030*730*220	50




Dimension (mm)	Package size (20pcs/Carton mm)	MOQ (Pcs)
490*490*50	1020*520*500	1000

## Flat head cabinet



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- High-density polyurethane foam, effectively insulates external heat;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.

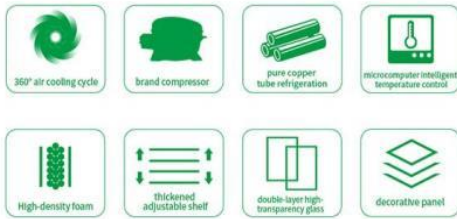

### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LG-2P	Double Door Remote Fridge	1440*750*2080	1463	900	2-8°C
LG-3P	Three Door Remote Fridge	2160*750*2080	2250	1350	2-8°C
LG-4P	Four Door Remote Fridge	2900*750*2080	3057	1800	2-8°C
LG-5P	Five Door Remote Fridge	3600*750*2080	3822	2700	2-8°C
LG-NP	N Door Remote Fridge	N *750*2080	N	N	2-8°C


## Sliding Door Display Chiller

Top mounted unit



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- High-density polyurethane foam, effectively insulates external heat;
- Air cooling cycle, uniform cooling, fast cooling and fresh-keeping.

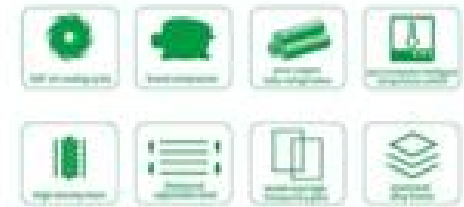

Bottom unit



Freezer use



### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LG-1100Y	Double Sliding Door Fridge	1100*600*1120	640	470	2-8°C
LG-1630Y	Three Sliding Door Fridge	1600*600*1120	960	740	2-8°C

## Island Freezer Free Combination



### Features


- 22 °C low temperature freezing, strong freezing power, no loss of nutrients;
- The glass door adopts special processes such as coating, and the outer surface is not easy to condense.
- Island cabinets can be combined arbitrarily, with beautiful appearance and more sufficient capacity.



### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(W)	Temperature
LD-X1450	1.45m island Freezer	1450*850*870	530	450	-18~-22°C
LD-X1850	1.85m island Freezer	1850*850*800	630	450	-18~-22°C
LD-X2100	2.1m island Freezer	2100*850*870	850	533	-18~-22°C
LD-X2500	2.5m island Freezer	2500*850*870	1040	566	-18~-22°C

## Island Freezer Free Combination

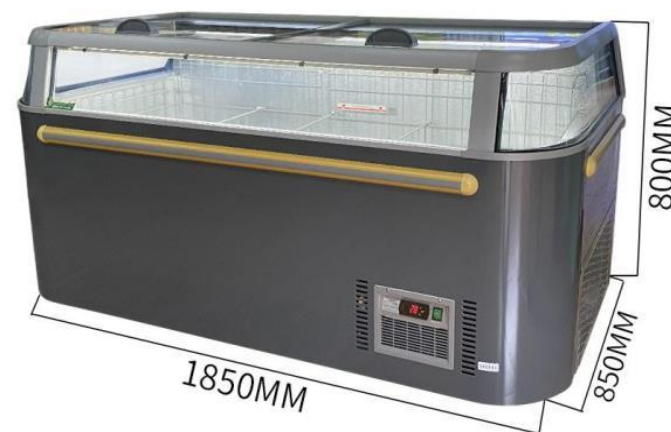

### Features

- 22 °C low temperature freezing, strong freezing power, no loss of nutrients;
- The glass door adopts special processes such as coating, and the outer surface is not easy to condense.
- Island cabinets can be combined arbitrarily, with beautiful appearance and more sufficient capacity.



### Product Specifications :

Model No.	Commodity Name	Dimension(mm)	Volume(L)	Power(W)	Temperature
LD-E185S	1.85m island Freezer	1850*850*800	630	450	-18~-22°C
LD-E210S	2.1m island Freezer	2100*850*870	850	533	-18~-22°C
LD-E250S	2.5m island Freezer	2500*850*870	1040	566	-18~-22°C


Size and color can be customized. Please consult us for detailed information.

## Plug-in System A-style Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

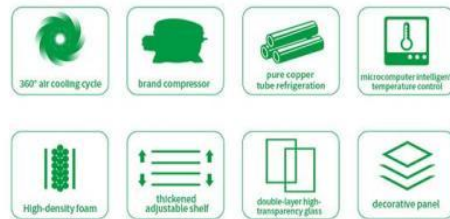

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
GHF-15	1.5m Built-in System Multideck Chiller	1500*950*2010	1168	1350	2~8°C
GHF-20	2.0m Built-in System Multideck Chiller	2000*950*2010	1583	1800	2~8°C
GHF-25	2.5m Built-in System Multideck Chiller	2500*950*2010	1997	2700	2~8°C
GHF-30	3.0m Built-in System Multideck Chiller	3000*950*2010	2412	2700	2~8°C

## Remote System A-style Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

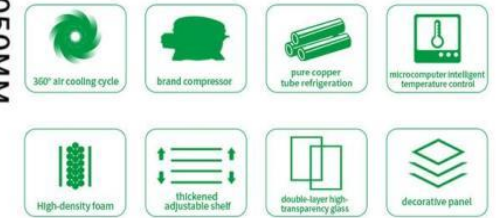

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
GHF-20	2.0m Remote System Multideck Chiller	2000*950*2050	1922	2700	2~8°C
GHF-25	2.5m Remote System Multideck Chiller	2500*950*2050	2425	2700	2~8°C
GHF-30	3.0m Remote System Multideck Chiller	3000*950*2050	2928	3600	2~8°C
GHF- N	N m Remote System Multideck Chiller	N *950*2050	N	N	2~8°C

## Built-in System Europe-style Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

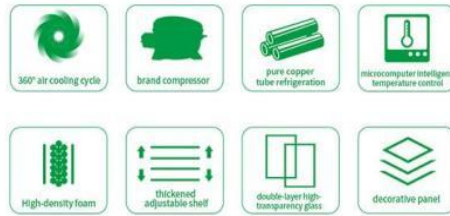

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LDF-2000	2.0m Built-in System Multideck Chiller	2000*950*2000	1420	1800	2~8°C
LDF-2500	2.5m Built-in System Multideck Chiller	2500*950*2000	1807	2700	2~8°C
LDF-3000	3.0m Built-in System Multideck Chiller	3000*950*2000	2194	2700	2~8°C
LDF-N	N m Built-in System Multideck Chiller	N *950*2000	N	N	2~8°C

## Remote System Europe-style Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

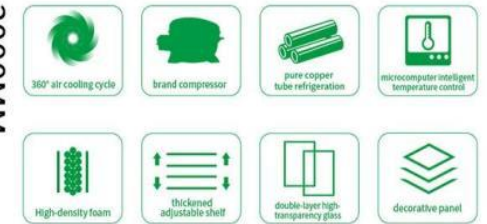

### Product Specifications :



Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
LDF-2000	2.0m Remote System Multideck Chiller	2000*1000*2000	1832	2700	2~8°C
LDF-2500	2.5m Remote System Multideck Chiller	2500*1000*2000	2332	2700	2~8°C
LDF-3000	3.0m Remote System Multideck Chiller	3000*1000*2000	2831	3600	2~8°C
LDF-N	N m Remote System Multideck Chiller	N *1000*2080	N	N	2~8°C

## Built-in System Right-angled Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

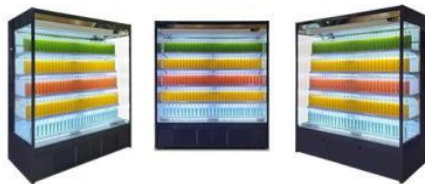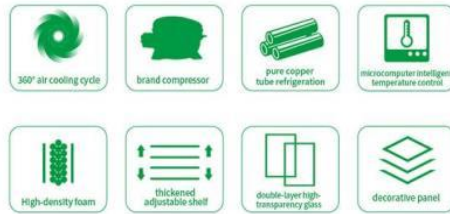

### Product Specifications:

Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
RC-1250P	1.25m Built-in System Multideck Chiller	1250*80*880*2080	1350	2~8°C
RC-1875P	1.875m Built-in System Multideck Chiller	1875*80*880*2080	1800	2~8°C
RC-2500P	2.5 m Built-in System Multideck Chiller	2500*80*880*2080	2700	2~8°C
RC- N P	N m Built-in System Multideck Chiller	N *880*2080	N	2~8°C



◆ The thickness of the side plate is 40mm, and the 2 pieces are 80mm.

## Remote System Right-angled Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

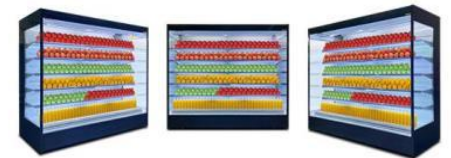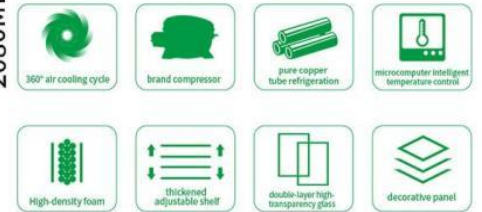

### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
RC-1250R	1.5m Right Angle Multideck Chiller	1250*80*880*2080	1350	2~8°C
RC-1875R	1.875m Right Angle Multideck Chiller	1875*80*880*2080	1800	2~8°C
RC-2500R	2.5 m Right Angle Multideck Chiller	2500*80*880*2080	2700	2~8°C
RC-3125R	3.125 m Right Angle Multideck Chiller	3125*80*880*2080	2700	2~8°C
RC-3750R	3.75 m Right Angle Multideck Chiller	3750*80*880*2080	2700	2~8°C
RC- N R	N m Right Angle Multideck Chiller	N *880*2080	N	2~8°C


◆ The thickness of the side plate is 40mm, and the 2 pieces are 80mm.

## Built-in System Mini Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

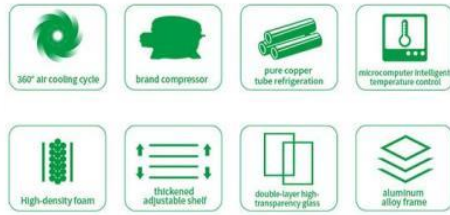


### Freezer use



### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
RCX-100P	1.00m Built-in System mini Multideck Chiller	1000*650*2080	1350	2~8°C
RCX-125P	1.25m Built-in System mini Multideck Chiller	1250*650*2000	1350	2~8°C
RCX-145P	1.45m Built-in System mini Multideck Chiller	1450*650*2000	1350	2~8°C

## Right Angle Mini Multideck Open Chiller

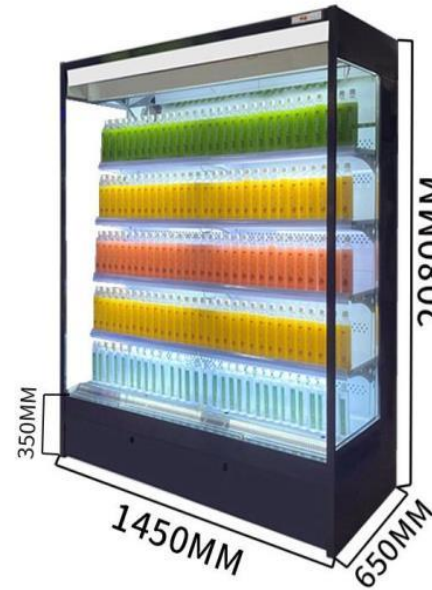

### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

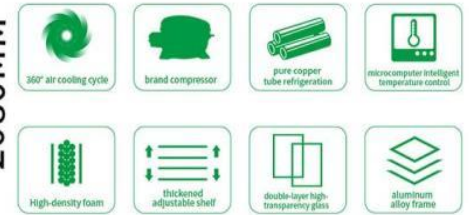

### Freezer use



### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
RCX-100R	1.00m Right Angle mini Multideck Chiller	1000*650*2080	1350	2~8°C
RCX-125R	1.25m Right Angle mini Multideck Chiller	1250*650*2000	1350	2~8°C
RCX-145R	1.45m Right Angle mini Multideck Chiller	1450*650*2000	1350	2~8°C

## Remote System Europe-style Fruit Showcase



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

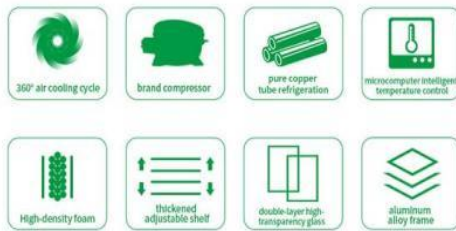

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
LDS-2000F	2.0m Remote System Multideck Chiller	2000*1000*1550	1800	2~8°C
LDS-2500F	2.5m Remote System Multideck Chiller	2500*1000*1550	2700	2~8°C
LDS-3000F	3.0m Remote System Multideck Chiller	3000*1000*1550	3600	2~8°C
LDS - N F	N m Remote System Multideck Chiller	N *1000*1550	N	2~8°C

## Remote System Europe-style Vegetable Display Case



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

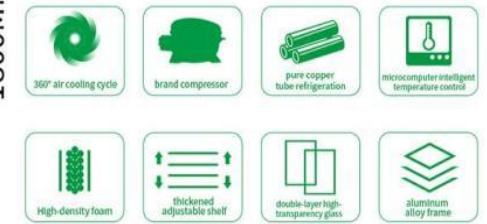

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
LDP-2000F	2.0m Remote System Multideck Chiller	2000*1000*1800	1800	2~8°C
LDP-2500F	2.5m Remote System Multideck Chiller	2500*1000*1800	2700	2~8°C
LDP-3000F	3.0m Remote System Multideck Chiller	3000*1000*1800	3600	2~8°C
LDP-NF	N m Remote System Multideck Chiller	N *1000*1800	N	2~8°C

## Square Multideck Open Chiller with Dual-Air Channel System



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

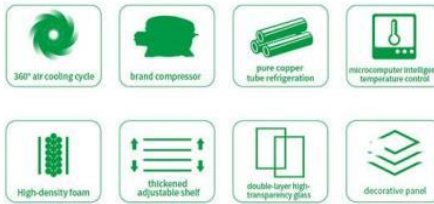

### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
RCS-1875	1.875m Right Angle Multideck Chiller	1875*80*880*2080	1258	1800	-2~5°C
RCS-2500	2.5 m Right Angle Multideck Chiller	2500*80*880*2080	<b>2000</b>	2700	-2~5°C
RCS-3750	3.75 m Right Angle Multideck Chiller	3750*80*880*2080	<b>3000</b>	2700	-2~5°C
RCS- N	N m Right Angle Multideck Chiller	N *880*2080	<b>N</b>	N	-2~5°C

◆ The thickness of the side plate is 40mm, and the 2 pieces are 80mm.

## Rounded Multideck Open Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Produces a surrounding diffuse radiant airflow from top to bottom to ensure uniform temperature everywhere.

### Freezer use



### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Temperature
RYD-2120	2.12m Multi-deck Round Island Open Chiller	<b>2120*2120*1580</b>	2~8°C
RYD-3370	3.37m Multi-deck Round Island Open Chiller	3370*2120*1580	2~8°C
RYD-3995	3.995m Multi-deck Round Island Open Chiller	3995*2120*1580	2~8°C
RYD-4620	4.62m Multi-deck Round Island Open Chiller	4620*2120*1580	2~8°C
RYD-5245	5.245m Multi-deck Round Island Open Chiller	5245*2120*1580	2~8°C

## Vertical Glass Door Multideck Chiller



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness;
- Cool lighting, super atmosphere, improve the grade of the store.

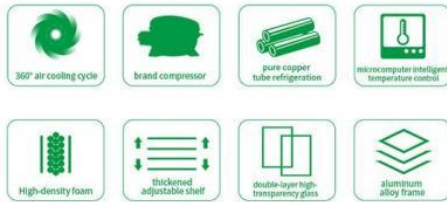

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
LG-3240	Four doors liquor display multideck chiller	3240*800*2080	1800	2~8°C
LG-4020	Five doors liquor display multideck chiller	4020*800*2080	2700	2~8°C
LG-4800	Six doors liquor display multideck chiller	4800*800*2080	3600	2~8°C
LG-N	N doors liquor display multideck chiller	N *800*2080	N	2~8°C

## Multideck Chiller With doors



### Features

- Pure copper tube refrigeration, low energy consumption and low noise;
- Frost-free air-cooling cycle, faster cooling and longer-lasting freshness.
- Beautiful appearance, dustproof and cold, keeping the freshness displayed correctly.

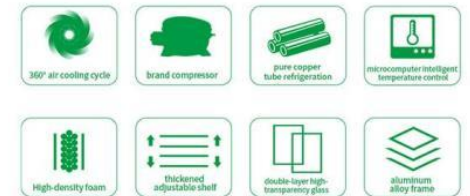

### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Power(w)	Temperature
RC-1250SD	Double Doors Open Chiller	1250*880*2080	1350	2~8°C
RC-1875SD	Three Doors Open Chiller	1875*880*2080	1800	2~8°C
RC-2500SD	Four Doors Open Chiller	2500*880*2080	2700	2~8°C
RC- N SD	N Doors Open Chiller	N *880*2080	N	2~8°C

◆ The thickness of the side plate is 40mm, and the 2 pieces are 80mm.

## Built in System Fresh Meat Display Freezer



### Features

- Microcomputer digital display temperature control, simple and easy to operate;
- Circulating air cooling, the cooling is faster and more uniform, and the freshness that belongs to you is locked;
- The inside of the cabinet is made of stainless steel, which is corrosion-resistant, easy to clean, and does not contaminate food.



### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(W)	Temperature
GHE-15	1.5m Fresh Meat Display Chiller	1500*1180*930	114	900	-5~5°C
GHE-20	2.0m Fresh Meat Display Chiller	2000*1180*930	155	900	-5~5°C
GHE-25	2.5m Fresh Meat Display Chiller	2500*1180*930	195	1350	-5~5°C
GHE-30	3.0m Fresh Meat Display Chiller	3000*1180*930	236	1800	-5~5°C
GHE-N	N m Fresh Meat Display Chiller	N *1180*930	N	N	-5~5°C

## Air-cooled Meat Display Chiller



### Features

- Microcomputer digital display temperature control, simple and easy to operate;
- Circulating air cooling, the cooling is faster and more uniform, and the freshness that belongs to you is locked;
- The inside of the cabinet is made of stainless steel, which is corrosion-resistant, easy to clean, and does not contaminate food.

### Freezer Application




FRESH MEAT VEGETABLES DAIRY FRUITS

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
GHE-15	1.5mDeli/Fresh Meat Display Freezer	1500*1180*930	114	900	-5~5°C
GHE-20	2.0mDeli/Fresh Meat Display Freezer	2000*1180*930	155	900	-5~5°C
GHE-25	2.5mDeli/Fresh Meat Display Freezer	2500*1180*930	195	1350	-5~5°C
GHE-30	3.0mDeli/Fresh Meat Display Freezer	3000*1180*930	236	1800	-5~5°C
GHE-N	N mDeli/Fresh Meat Display Freezer	N *1180*930	N	N	-5~5°C

## Right-angled Deli Showcase

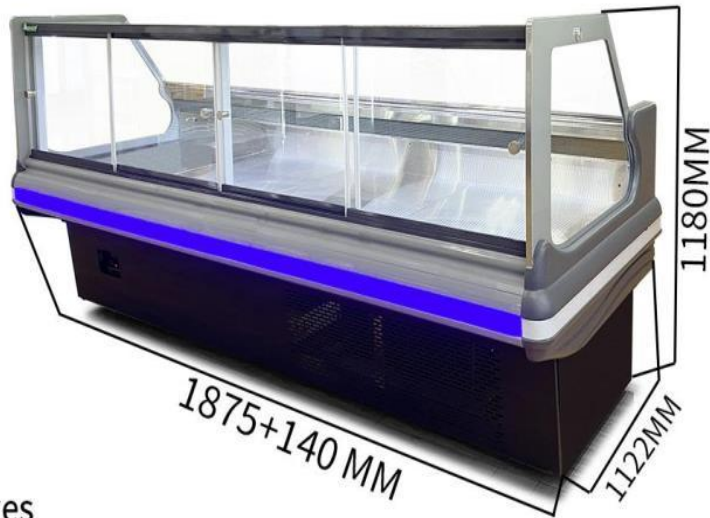

### Features

- Microcomputer digital display temperature control, simple and easy to operate;
- Circulating air cooling, the cooling is faster and more uniform, and the freshness that belongs to you is locked;
- The inside of the cabinet is made of food-grade stainless steel, which is corrosion-resistant and easy to clean. Does not contaminate food.



### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Temperature
IM-1250SD	1.25m Right angle deli cabinet	1250+140*1122*1180	2~8°C
IM-1875SD	1.875m Right angle deli cabinet	1875+140*1122*1180	2~8°C
IM-2500SD	2.5m Right angle deli cabinet	2500+140*1122*1180	2~8°C
IM-3125SD	3.125m Right angle deli cabinet	3125+140*1122*1180	2~8°C
IM-3750SD	3.75m Right angle deli cabinet	3750+140*1122*1180	2~8°C

◆ The thickness of the side plate is 70mm, and the 2 pieces are 140mm.

## 16 Pans Ice Cream Showcase



### Features


- Interior LED lighting
- Self contained, fan cooling system
- Intelligent temperature control
- Stainless steel GN pans for display
- Four caster wheels



### Product Specifications :


Model No.	Dimension(mm)	Temperature	Pan Qty	Refrigerant
WBQ-12	1200*1050*1200	-18 ~ -22°C	12pans	R404a
WBQ-14	1350*1050*1200	-18 ~ -22°C	14pans	R404a
WBQ-16	1550*1050*1200	-18 ~ -22°C	16pans	R404a
WBQ-18	1700*1050*1200	-18 ~ -22°C	18pans	R404a
WBQ-20	1900*1050*1200	-18 ~ -22°C	20pans	R404a

## Right-angled Deli Showcase

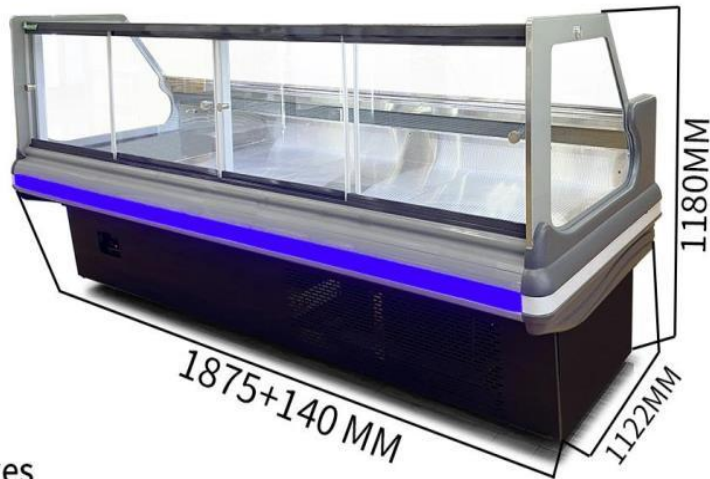

### Features

- Microcomputer digital display temperature control, simple and easy to operate;
- Circulating air cooling, the cooling is faster and more uniform, and the freshness that belongs to you is locked;
- The inside of the cabinet is made of food-grade stainless steel, which is corrosion-resistant and easy to clean. Does not contaminate food.



### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Temperature
IM-1250SD	1.25m Right angle deli cabinet	1250*140*1122*1180	2~8°C
IM-1875SD	1.875m Right angle deli cabinet	1875+140*1122*1180	2~8°C
IM-2500SD	2.5m Right angle deli cabinet	2500+140*1122*1180	2~8°C
IM-3125SD	3.125m Right angle deli cabinet	3125+140*1122*1180	2~8°C
IM-3750SD	3.75m Right angle deli cabinet	3750+140*1122*1180	2~8°C

◆ The thickness of the side plate is 70mm, and the 2 pieces are 140mm.

## 16 Pans Ice Cream Showcase



### Features

- Interior LED lighting
- Self contained, fan cooling system
- Intelligent temperature control
- Stainless steel GN pans for display
- Four caster wheels



### Product Specifications :

Model No.	Dimension(mm)	Temperature	Pan Qty	Refrigerant
WBQ-12	1200*1050*1200	-18 ~ -22°C	12pans	R404a
WBQ-14	1350*1050*1200	-18 ~ -22°C	14pans	R404a
WBQ-16	1550*1050*1200	-18 ~ -22°C	16pans	R404a
WBQ-18	1700*1050*1200	-18 ~ -22°C	18pans	R404a
WBQ-20	1900*1050*1200	-18 ~ -22°C	20pans	R404a

## Horizontal Type Fruit Showcase



### Features

- Pure copper tube cooling, cooling is faster.
- 360° circulating air cooling, better cold storage and freshness.
- The inside of the cabinet is made of food-grade stainless steel, which is anti-corrosion, beautiful and easy to clean.

### Product Specifications :

Model No.	Commodity name	Dimension (mm)	Volume	Power(w)	Temperature
GHT-20	<b>2.0m horizontal fruit showcase</b>	2000*1000*900	455	900	2~8°C
GHT-25	<b>2.5m horizontal fruit showcase</b>	2500*1000*900	575	1350	2~8°C
GHT-30	<b>3m horizontal fruit showcase</b>	3000*1000*900	695	1800	2~8°C
GHT-N	<b>Nm horizontal fruit showcase</b>	N *1000*900	N	N	2~8°C

### Freezer use



FRUITS VEGETABLES DAIRY FRESH MEAT

## Promotion Item Europe-style Food Chiller



### Features

- Pure copper tube cooling, cooling is faster.
- 360° circulating air cooling, better cold storage and freshness.
- The inside of the cabinet is made of food-grade stainless steel, which is anti-corrosion, beautiful and easy to clean.

### Product Specifications :


Model No.	Commodity name	Dimension (mm)	Power	Temperature
GHE-15	1.5m Open Island Chiller	1500*1130*900	900	2~10°C
GHE-20	2.0m Open Island Chiller	2000*1130*900	900	2~10°C
GHE-25	2.5m Open Island Chiller	2500*1130*900	1350	2~10°C
GHE-30	3.0m Open Island Chiller	3000*1130*900	1800	2~10°C
GHE-N	N m Open Island Chiller	N *1130*900	N	2~10°C

### Freezer use



FRUITS VEGETABLES DAIRY FRESH MEAT

# COLD ROOM

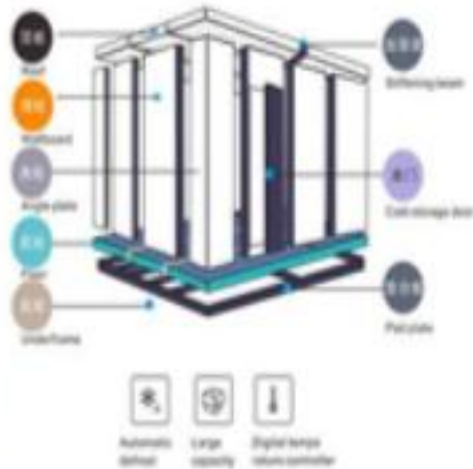

The cold storage board is made of light polyurethane core material with good heat insulation performance. It is composed of PVC color steel plate, stainless steel plate, embossed aluminum plate, salinization steel plate, galvanized plate and so on. These components reduce heat transfer due to internal and external temperature differences to achieve the maximum efficiency of the refrigeration system. The thickness of the cold storage board specifications: 50/60/75/100/120/150/200 mm. Cold storage board size specification: the width of the standardized cold storage board is 1M, the height is 2M to 15M. Note: According to the special requirements of customers we can also be customized for you.



**Classification of cold storage doors -**  
 customized according to the needs of different industries. Green association cold storage door, reasonable structure design, good sealing performance, external Beautiful appearance, reliable quality, flexible control and long service life.

As long as you provide the following information, Lvdi will design the best cold storage solution for you

- Area and capacity of cold storage
- Type and packaging of stored food
- Temperature of food before storage
- Usage site (outdoor or indoor)
- Warehouse temperature requirements for storing food
- Cold storage daily throughput

Refrigeration unit compressor is the heart of cold storage  
 We are divided into the following units





Model	SL900C2-GL	SL1365C3-GL	SL900C2-S
Classification	Chiller	Chiller	Chiller
Dimension (WxDxH mm)	640*640*1860	640*640 (6 surfaces) *1860	1260*680*1860
Power (W)	580w220v	720w220v	780w220v
Capacity (L)	/	/	/
Net weight (KG)	80KG	150KG	150KG
Refrigerant	134a	134a	134a
Temperature (°C)	4°C-10°C	4°C-10°C	4°C-10°C
Cooling system	Air cooling	Air cooling	Air cooling

# Cake Showcase



# BAKERY EQUIPMENT

**CAKE SHOWCASE**



**COMMERCIAL REFRIGERATOR**



### OPEN TYPE CAKE SHOWCASE

L\*W\*H(1200/1500)\*800\*138

Power : AC220V/50HZ

Temperature: +2°C ∞+8°C

Electric load: KW=0.73/0.84/1.16



### RIGHT ANGLE CAKE SHOWCASE (front open)

L\*W\*H(1200/1500/1800/2200/2400)\*1200\*1400H

Power: AC220V/50HZ

Temperature: +2°C ∞+8°C

Electric load : KW=1.0/1.1/1.4.2.9



## PASTRY SHOWCASE

L\*W\*H(1000/1200/1500/1800)\*1000\*800

Power : AC220V/50HZ

Temperature: : +2°C ∞ +8°C

Electric load : KW=0.7/0.8/1.0/1.1/1.4



## PASTRY SHOWCASE

L\*W\*H(1000/1200/1500/1800)\*900\*700

Power : AC220V/50HZ

Temperature: : +2°C ∞ +8°C

Electric load: KW=0.7/0.8/1.0/1.1/1.4



## UPRIGHT SHOWCASE

L\*W\*H(1200/1500/1800)\*700\*1860

Power: AC220V/50HZ

Temperature: +2°C ∞+8°C

Electric load : KW=1.1/1.3.1.65



## UPRIGHT SHOWCASE WITH CURVED GLASS

L\*W\*H(1200/1500/1800)\*700\*1860

Power : AC220V/50HZ

Temperature: +2°C ∞+8°C

Electric load : KW=1.1/1.3.1.65




## PASTRY SHOWCASE

1770\*650\*1050

Power : AC220V/50HZ

Temperature : +4°C ∞ +12°C

Electric load : KM=0.7/0.8/1./1.1/1.4

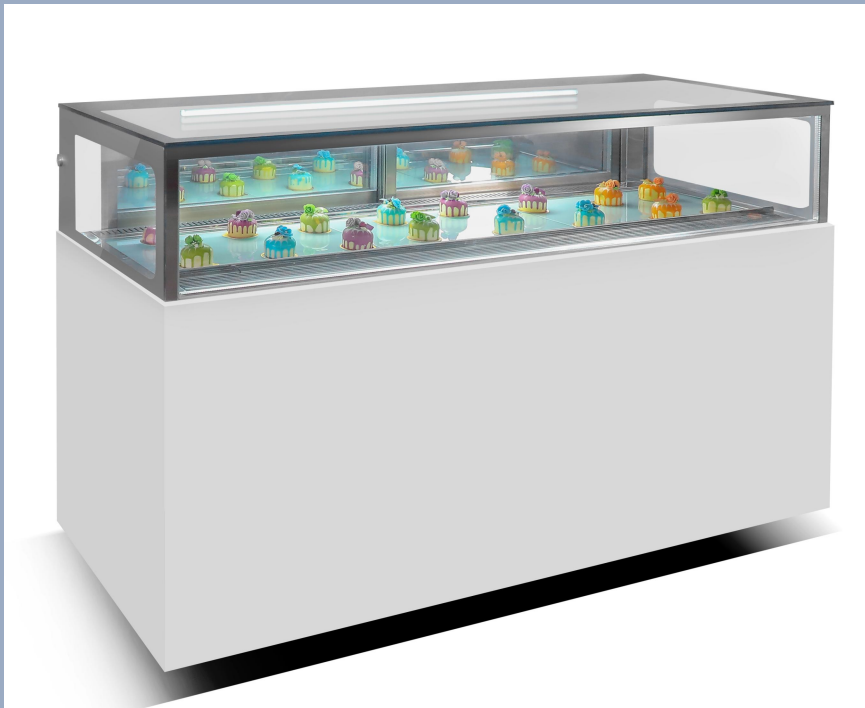

## EURO.STYLE CAKE SHOWCASE (front open)

L\*W\*H ( 1200/1500/1800 ) 800\*1380

Power : AC220V/50HZ

Temperature: +2°C ∞ +8°C

Electric load : KM=0.7/0.8/1./1.1/1.4



**RIGHT ANGLE FREEZER (back open)**

**L\*W\*H(1200/1500/1800/2200/2400)\*750\*1350**

**Power : AC220V/50HZ**

**Temperature: : +2°C ∞+8°C**

**KW=0.7/0.8/1.0/1.1/1.4**



**RIGHT ANGLE FREEZER (back open)**

**L\*W\*H(1200/1500/1800/2200/2400)\*750\*1250**

**Power : AC220V/50HZ**

**Temperature: : +2°C ∞+8°C**

**KW=0.7/0.8/1.0/1.1/1.4**



**DOUBLE ARK CURVED GLASS CAKE SHOWCASE**  
**L\*W\*H (1200/1500/1800) 900\*1100**



**145°C CURVE CAKE SHOWCASE**  
**L\*W\*H (1200/1500/1800) 800\*1380**



**AIR COOLING UNDERCOUNTER REFRIGERATOR**

**1200\*760\*800**

**1500\*760\*800**

**1800\*760\*800**

**Temperature:: 2°C- 8°C      Electric load  
300W**

**Temperature:: - 14°C - - 18°C Electric  
load : 500W**

**Power : AC220V/50HZ**

**Product advantage:**

**Unit in drawer easy repair**



**AIR COOLING UPRIGHT FREEZER WITH  
TRAY RACK ( 2door)**

**620\*820\*2000**

**Temperature:: - 18°C~ - 22°C**

**Electric load : 500W**

**Power : AC220V/50HZ**



**Air-cooling up right  
freezer(4door)  
1200\*820\*2000  
Temperature:22°C**

**Temperature::: 2~8°C  
Electric load : 600W  
emperature::: - 18°C~ - 22°C  
Electric load : 900W  
Power : AC220V/50HZ**



**Air-cooling up  
right  
freezer(6door)  
1800\*820\*2000  
Temperature:22°C**

**Temperature::: 2~8°C  
Electric load : 900W  
Temperature::: - 18°C~ - 22°C  
Electric load : 1300W  
Power : AC220V/50HZ**



**Danfoss  
compressor ,  
pure copper  
pipe, speedy  
freeze, and good  
heat  
preservation  
effect.**

**36 TRAY PROOFER**  
**780\*1210\*2050**  
**cooler, freezer& double temperature.**



**36 TRAY PROOFER**  
**780\*1210\*2050,**  
**cooler, freezer&**  
**double temperature.**

Touch screen controller,  
accurate temperature control,  
humidity control and time  
control; automatic  
stop;;alarm;convenient and  
energy saving.

**bottom type controller, simple and convenient to operate, with high precision temperature and humidity control,**